

ANGLE GRINDERS

Fuji offers a wide variety of angle grinders for use in any grinding operation. Many models have features of machined bevel gears, speed control governor, built in exhaust and a patented gear cooling design. Fuji has more models and variations than any other manufacturer.



FA-2C-1



FA-2C-2BF



FA-3C-1



FA-3C-1F



FA-2CX-1



FA-2CX-2BF




FA-3CX-1



FA-3CX-2F

FA-2C-3* KIT AND APPLICATIONS

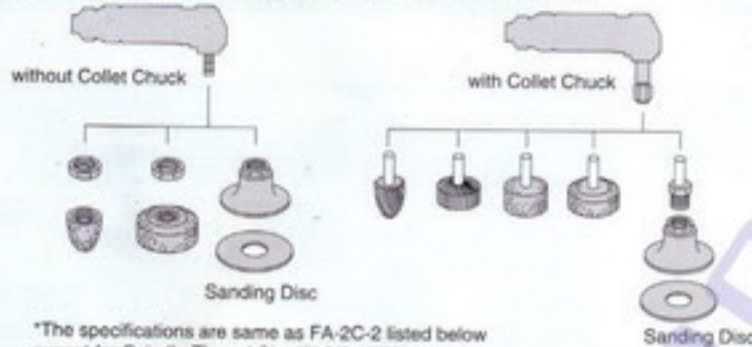

*The specifications are same as FA-2C-2 listed below except for Spindle Thread Size W 3/8-16(M).

FA-2C-3 KIT



Model	Throttle Type	Collet Size		Max. Dia (Grinding Wheel)		Free Speed min ⁻¹	Spindle Thread Size in	Angle Head Height		Overall Length		Mass		Max. Air Consumption		Air Hose Size	
		mm	in	mm	in			mm	in	mm	in	kg	lb	Nm ² /min	Nft ² /min	mm	in
FA-2C-1	Ring	-	-	50	2	15,000	U ¹ / ₄ -28(F)	46	1 ¹³ / ₁₆	157	6 ³ / ₁₆	0.6	1.3	0.40	14.1	9.5	3/8
FA-2C-1BF	Lever	-	-	50	2	15,000	U ¹ / ₄ -28(F)	46	1 ¹³ / ₁₆	188	7 ¹³ / ₃₂	0.7	1.5	0.40	14.1	9.5	3/8
FA-2C-2	Ring	6	1/4	-	-	15,000	U ³ / ₈ -24(M)	90	3 ³⁵ / ₆₄	157	6 ³ / ₁₆	0.6	1.3	0.40	14.1	9.5	3/8
FA-2C-2BF	Lever	6	1/4	-	-	15,000	U ³ / ₈ -16(M)	90	3 ³⁵ / ₆₄	188	7 ¹³ / ₃₂	0.7	1.5	0.40	14.1	9.5	3/8
FA-2C-3	Ring	6	1/4	-	-	15,000	W ³ / ₈ -16(M)	90	3 ³⁵ / ₆₄	157	6 ³ / ₁₆	0.6	1.3	0.40	14.1	9.5	3/8
FA-2C-3BF	Lever	6	1/4	-	-	15,000	W ³ / ₈ -16(M)	90	3 ³⁵ / ₆₄	188	7 ¹³ / ₃₂	0.7	1.5	0.40	14.1	9.5	3/8
FA-3C-1	Roll	-	-	75	3	15,000	M8-P1.25(F)	64	2 ³³ / ₆₄	180	7 ³ / ₃₂	1.2	2.6	0.40	14.1	9.5	3/8
FA-3C-1F	Lever	-	-	75	3	15,000	M8-P1.25(F)	64	2 ³³ / ₆₄	190	7 ³¹ / ₆₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3C-2	Roll	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	180	7 ³ / ₃₂	1.2	2.6	0.40	14.1	9.5	3/8
FA-3C-2F	Lever	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	190	7 ³¹ / ₆₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3C-6	Roll	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	180	7 ³ / ₃₂	1.2	2.6	0.40	14.1	9.5	3/8
FA-3C-6F	Lever	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	190	7 ³¹ / ₆₄	1.2	2.6	0.40	14.1	9.5	3/8
REAR EXHAUST TYPE																	
FA-2CX-1	Ring	-	-	50	2	15,000	U ¹ / ₄ -28(F)	46	1 ¹³ / ₁₆	197	7 ³ / ₄	0.7	1.5	0.40	14.1	9.5	3/8
FA-2CX-1BF	Lever	-	-	50	2	15,000	U ¹ / ₄ -28(F)	46	1 ¹³ / ₁₆	226	8 ⁵⁷ / ₆₄	1.0	2.2	0.40	14.1	9.5	3/8
FA-2CX-2	Ring	6	1/4	-	-	15,000	U ³ / ₈ -24(M)	90	3 ³⁵ / ₆₄	197	7 ³ / ₄	0.7	1.5	0.40	14.1	9.5	3/8
FA-2CX-2BF	Lever	6	1/4	-	-	15,000	U ³ / ₈ -24(M)	90	3 ³⁵ / ₆₄	226	8 ⁵⁷ / ₆₄	1.0	2.2	0.40	14.1	9.5	3/8
FA-2CX-3	Ring	6	1/4	-	-	15,000	W ³ / ₈ -16(M)	90	3 ³⁵ / ₆₄	197	7 ³ / ₄	0.7	1.5	0.40	14.1	9.5	3/8
FA-2CX-3BF	Lever	6	1/4	-	-	15,000	W ³ / ₈ -16(M)	90	3 ³⁵ / ₆₄	226	8 ⁵⁷ / ₆₄	1.0	2.2	0.40	14.1	9.5	3/8
FA-3CX-1	Ring	-	-	75	3	15,000	M8-P1.25(F)	64	2 ³³ / ₆₄	217	8 ³⁵ / ₆₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3CX-1F	Lever	-	-	75	3	15,000	M8-P1.25(F)	64	2 ³³ / ₆₄	247	9 ³ / ₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3CX-2	Ring	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	217	8 ³⁵ / ₆₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3CX-2F	Lever	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	247	9 ³ / ₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3CX-6	Ring	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	217	8 ³⁵ / ₆₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3CX-6F	Lever	-	-	100	4	13,500	M8-P1.25(F)	64	2 ³³ / ₆₄	247	9 ³ / ₄	1.2	2.6	0.40	14.1	9.5	3/8
FA-3CX-9F	Lever	-	-	125	5	12,200	M8-P1.25(F)	64	2 ³³ / ₆₄	247	9 ³ / ₄	1.2	2.6	0.40	14.1	9.5	3/8

The models with "F" at the end of the model names are Locking Throttle type.
Spindle Thread Size : (F) Female Spindle, (M) Male Spindle.